







Aastra 6753i Quick Reference Guide


Getting started

Programmable keys - all 6 keys are programmable.


Default functions:

-  1: SAVE - Allows you to save numbers
-  2: DELETE - Allows you to delete entries
-  3: DIRECTORY - Displays up to 200 names
-  4: CALLERS LIST - Access to last 200 calls received
-  5: TRANSFER - Transfers active call
-  6: CONFERENCE - Begins conference


SAVE and DELETE keys must be unlocked by the System Administrator before they can be changed.

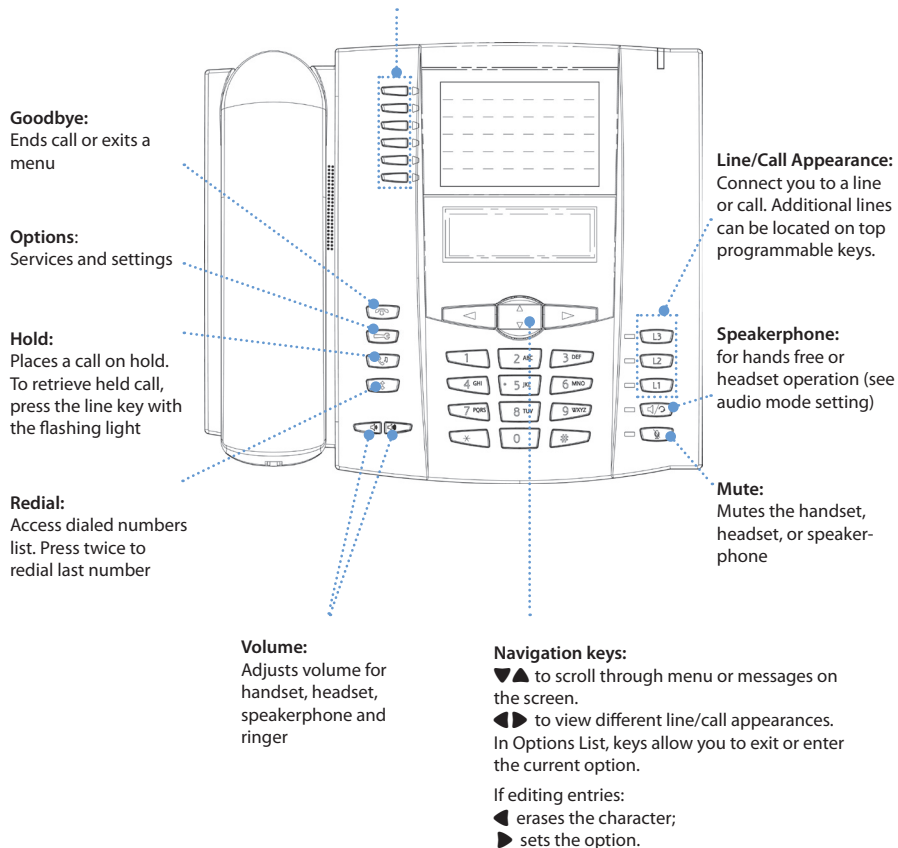

Placing a Call

1. Lift the handset, press the **Line** key or  key.
2. Dial the number from the keypad.

Answering a call


Lift the handset for handset operation or press the **Line** key or  key for hands free operation.

Ending a call


To end the call replace the handset or press .



Redial



Press  key twice to call the last dialed recently dialed number. Press the key once to access the list of recently dialed numbers, use ▼▲ to scroll through.

Call mute

Press  key to mute the handset, headset, or speakerphone.

Advanced Call Handling

Call Hold and Resume

1. To put a call on hold, press  key when connected to the call.
2. To retrieve the call, press  key again or press the **Line** key where that call is being held.

Call Transfer

1. Press **Transfer** key – this places the current call on hold.
2. Dial the number of the person you want to transfer the call to.
3. To transfer the call before the other person answers, press **Transfer** key before the receiving end answers.
4. Or, wait until the person has answered before completing the transfer by pressing **Transfer** key again.


3-Way Conference

1. During a regular call press **Conference** key.
2. Dial the person you want to join your call or press the **Line** key where the other person is being held.
3. Once this person has answered press **Conference** key again to establish the 3-way call.

Call Forwarding


Your phone supports different types of Call Forwarding: All, Busy, and No Answer. Your system can also support additional configuration options. Please check with your system administrator or the phone User Guide for additional details.

Ignoring a call

Press  key during ringing without picking up the handset to send the incoming call directly to voicemail*.

Other features


Callers List

1. Press **Callers** key. Press ▼ and ▲ to move through list.
2. To dial the displayed number just lift the Handset or press  or any **Line** key.
3. Press **Callers** key to cancel.

Speed Dialing

To create a speed dial

Press and hold a programmable key or keypad key, then enter contact's Name and number.


Or press  key and go to *Preferences->Speed Dial Edit*.

Note: Programmable keys 1 & 2, SAVE and DELETE, must be unlocked by the System Administrator before they can be changed.


To use the speed dial

To dial a contact assigned to speed dial, press the corresponding programmable key or press and hold the keypad key for 3 seconds.

To edit a speed dial


1. Press  key and go to *Preferences->Speed Dial Edit*.
2. Select the programmable key or keypad key where the speed dial is currently configured.

Voice Mail *

1. Press the **Voice Mail*** key that your System Administrator set up to access voicemail.
2. Press  key to toggle the audio between speakerphone, handset and headset (where applicable).


Phone Lock/Unlock

Phone can be locked to prevent unauthorized use

1. Press  key.
2. Select **Phone Lock** and press **Enter**.
3. Press ► to set the phone to lock.
4. "Phone is locked" is displayed on the screen.


Only numbers defined under the Emergency Dial Plan can be dialed while the phone is locked.

To unlock the phone


1. Press  key.
2. Enter your User password (default: 22222) and press **Enter**.
3. The phone unlocks.

Customizing your Phone

Volume Adjustment


Press the  keys to adjust handset, headset, and speakerphone volume during a call. Pressing these keys in idle adjusts the ringer volume.

To set the volume level for the Headset microphone:

1. Press  key and select *Preferences -> Set Audio -> Audio Mode-> Headset Mic Volume*.
2. Use ▼▲ to select Low, Medium or High (Default: Medium).
3. Press **Set**.

Ring Tones

To select a different Ring Tone

1. Press  key and select *Preferences -> Tones -> Ring Tone*.
2. Select the preferred ring tone (Tone 1 through Tone 5, or Silent).

Changing the User Password

Please contact your system administrator for instructions.

Additional Customization*

You can customize additional options using the phone Web Interface. Please contact your system administrator for instructions.

* Optional feature that must be configured by the system/service administrator. Particulars and menu options may vary. Feature may operate differently, please contact your system administrator for details.